


HM-1734-PLM Point I/O Wiring Connections

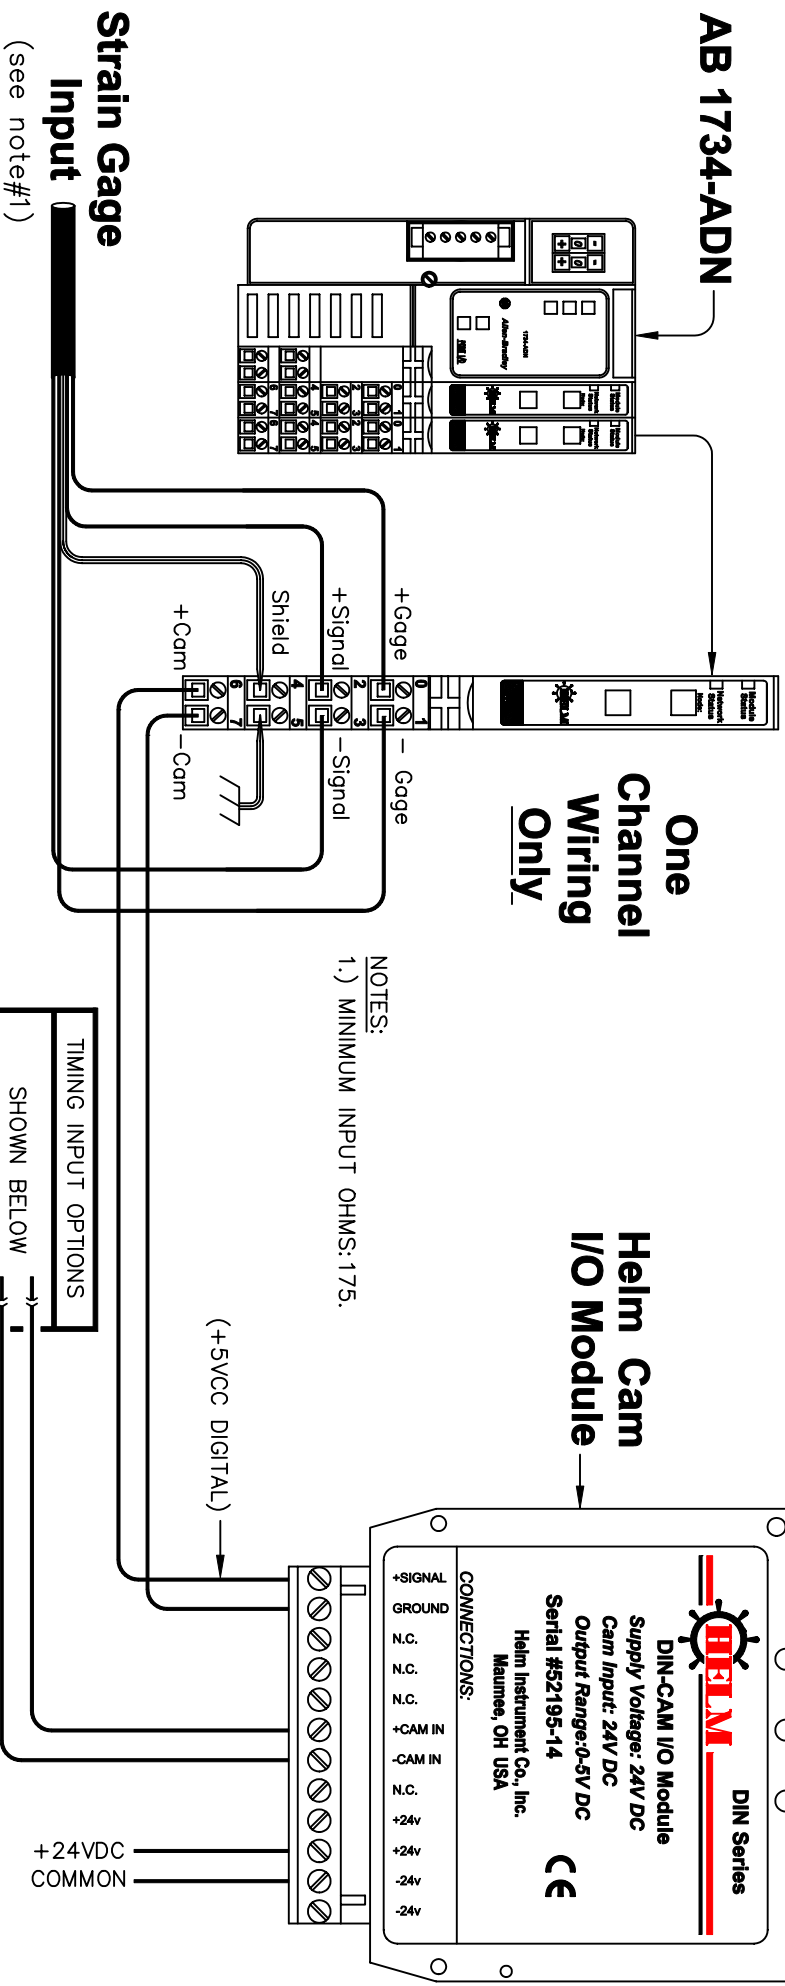

One Channel Wiring Only

Helm Cam I/O Module

NOTES:
1.) MINIMUM INPUT OHMS: 175.

Strain Gage Input

(see note#1)

EXTERNAL DRY-CONTACT CAM SWITCH	24 VDC PLC OUTPUT	EXTERNAL 2-WIRE PROX PROBE	EXTERNAL 3-WIRE PROX PROBE	TRANSISTOR-TYPE OUTPUT



THIS DRAWING AS WELL AS THE SUBJECT MATTER THEREON IS EXCLUSIVE PROPERTY OF HELM INSTRUMENT CO., INC. IT IS TO BE TREATED BY YOU AS CONFIDENTIAL, PROPRIETARY INFORMATION. THE DRAWING OR SUBJECT MATTER THEREOF SHALL NO BE DUPLICATED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN CONSENT OF HELM INSTRUMENT CO., INC.

SCALE: 3/4	DESIGNED BY: N.F.N.	DRAWN BY: M.H.L.
DATE: 04/01/14	CHECKED BY: N.F.N.	APPROVED BY: R.J.G.
TITLE: SENSOR CONNECTIONS, HM-1734-PLM (HELM)		
DRAWER: DRAWING NUMBER: E1133W07		