
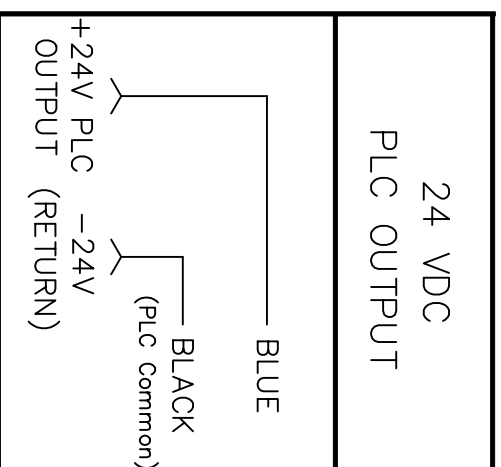
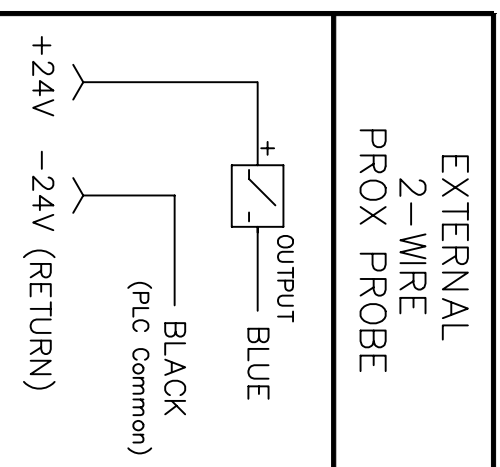


OPTIONAL AUXILIARY TIMING INPUT

NOTES:


- Any of the following (3) input devices can be used for an external timing input signal, if required.
- External timing input is required for "optional" functions i.e., "low alarm inhibit".

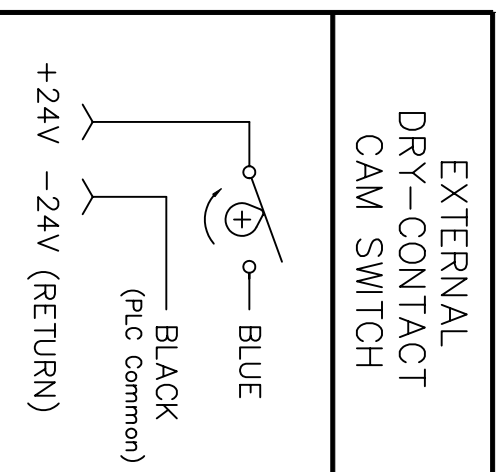

ALARM OUTPUT WIRING

NOTES:

- This output is solid state.
- Output rating = .25 amps at 24VDC.

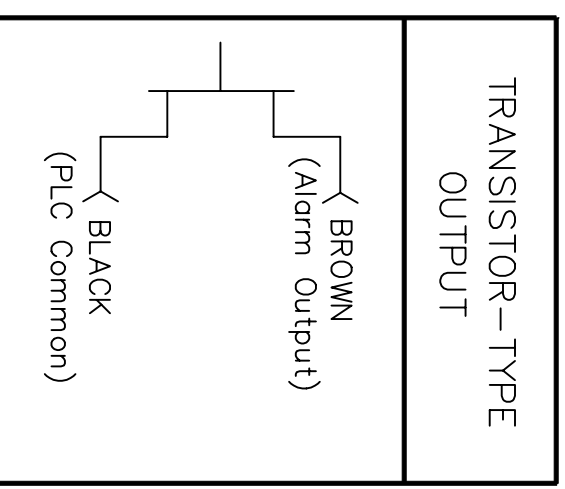

THIS DRAWING AS WELL AS THE SUBJECT MATTER THEREON IS EXCLUSIVE PROPERTY OF HELM INSTRUMENT CO., INC. IT IS TO BE TREATED BY YOU AS CONFIDENTIAL, PROPRIETARY INFORMATION. THE DRAWING OR SUBJECT MATTER THEREOF SHALL NO BE DUPLICATED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN CONSENT OF HELM INSTRUMENT CO., INC.

SCALE:	NONE	DESIGNED BY:	N.F.N.	DRAWN BY:	M.H.L.
DATE:	09/08/04	CHECKED BY:	N.F.N.	APPROVED BY:	R.J.G.
TITLE:	STOP/AUX. INPUT WIRING OPTIONS (HELM)				
DRAWER:	DRAWING NUMBER: E1095W07A				